

PPM1

SERVICE ACTIVATION PON POWER METER

- Versatile dual-layer tester purpose-built for service activation of PON, with added broadband capabilities.



KEY FEATURES AND BENEFITS

Unique PON-aware™ capability: helps to select the appropriate PON technology under test

Supports 1G/10G PON networks: G/EPON and XGS-PON/10G-EPON

No training required: color touchscreen with a highly intuitive GUI

Robust and rugged: IP54 design for dust and water protection

3-year warranty and calibration interval

Visual fault locator (PRO model)

Broadband power meter mode (PRO model)

APPLICATIONS

Multilayer FTTx PON downstream service activation

GPON, EPON, XGS-PON, 10G-EPON, RF video and RFoG service activation

Network troubleshooting

Insertion loss measurement

Fiber tracing

RELATED PRODUCTS AND ACCESSORIES



Fiber inspection scope
FIP-500



FTTH residential services tester
EX10



FTTH and business services tester
EX1



PON power meter
PPM-350D



Cleaning kits

NEXT-GENERATION PON SERVICE ACTIVATION


Next-generation passive optical networks (PONs) will, in most cases, leverage existing outdoor plant infrastructure already in use for PON customers. Adding new services on existing networks translates into overlaying multiple wavelengths on the same physical fiber plant.

A SINGLE POWER METER FOR 1G AND 10G NETWORKS

EXFO's PPM1 is compatible with multiple services including GPON, EPON, XGS-PON and 10G-EPON technologies. Its PON-layer wavelength-selective design allows it to measure up to two downstream signals simultaneously, assessing power level for rapid and reliable service activation.

PON-AWARE TECHNOLOGY

By leveraging customizable or preset PON layer configurations, the PPM1 notifies the user and recommends the available PON layer for the network under test for proper pass/fail assessment, enabling error-free testing.

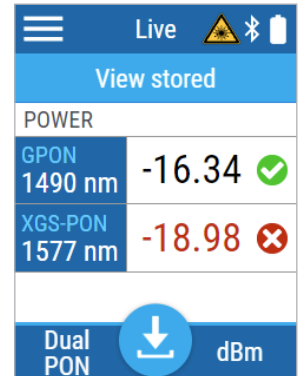


PRO MODEL: ALL-IN-ONE VERSATILE POWER METER

Mode for broadband

On top of the PON mode, the PPM1 PRO features a Broadband Power Meter mode calibrated at five wavelengths with the following capabilities when used in combination with an EXFO light source: auto-wavelength detection and switching, modulated tone detection, power and loss measurement.

Visual fault locator (VFL)

The PRO model includes a VFL that emits light in three different modes (continuous, slow blink and fast blink) to trace fibers and identify breaks and macrobends.

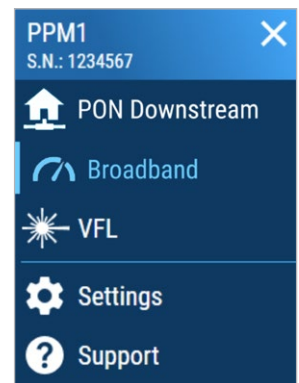

LOW COST OF OWNERSHIP

Designed for extended use in the field, the PPM1 delivers best-in-class optical performances—day in, day out. Backed by EXFO's track record of device robustness and its IP54 design for water and dust protection, this tester is an extremely reliable and long-lasting investment.



Long-lasting LiPo rechargeable
and field-replaceable battery



Designed for field use



EXFO's proven
robustness



3-year calibration

Cut costs related to factory
returns and downtime



IP54 design

Water and dust protection

PPM1

Simultaneous measurement of up to two downstream signals

PON technologies supported: GPON, EPON, XG(S)-PON, RF video overlay, RFoG, downstream measurement

Pass/fail status

3 calibrated wavelengths



PPM1-PRO

In addition to PPM1 capabilities, the PRO model features:

Auto-wavelength recognition and switching


Tone detection

Broadband power meter

VFL (3 modes: continuous, slow blink, fast blink)

5 calibrated wavelengths

EXPERIENCE THE INTUITIVE INTERFACE ON YOUR OWN

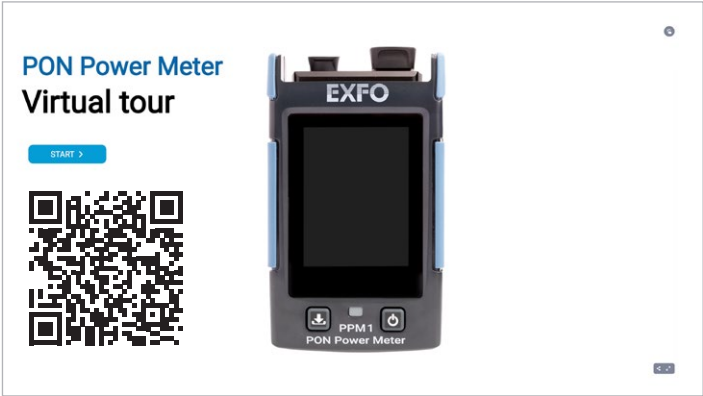




SHARE TEST RESULTS. BOOST COMPLIANCE. UNLOCK INSIGHTS.

Cloud-hosted solution for sharing test results and ensuring compliance.

Paired with EXFO's leading test instruments, EXFO Exchange drives an entire ecosystem, while integrating seamlessly with existing operation processes.

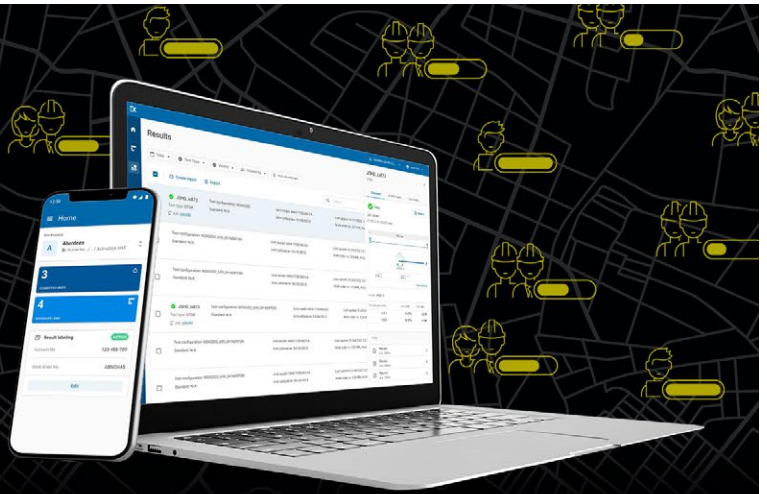

KEY BENEFITS



Automate test results management



Boost compliance and efficiency



Improve collaboration and visibility



Access comprehensive reporting




Unlock insights to see what matters

SIMPLE SETUP IN THREE STEPS

1

Create your free EXFO Exchange account

Begin your journey by creating an EXFO Exchange account. Setting up your account is quick and easy.



2

Install the mobile app

Download the EXFO Exchange app to allow test data from compatible EXFO devices to be uploaded securely to the cloud (free of charge).



For MaxTester and FTB users, install the native app.



3

Save time and boost efficiency

Once your account created—and the mobile app installed and paired with compatible EXFO devices—all test results will be sent to the cloud. On the web app, you will see field test results from all invited testers.



Get started >



SPECIFICATIONS

FTTX (PON MODE)		
	PPM1-D	PPM1-PRO-D
Spectral passband (nm)	1490 ±10, 1550 ±10, 1577 ±10	
Calibrated wavelengths (nm)	1490, 1550, 1577	1310, 1490, 1550, 1577, 1625
Power measurement range (dBm)	15 to -45	
Power uncertainty (dB) ^a	0.5	
ORL (dB) ^a	55	
Visual fault locator	No	Yes (3 modes—continuous, 1 Hz, 4 Hz)
Dedicated live tone detection ^b	Yes	Yes

BROADBAND POWER METER SPECIFICATIONS (PPM1-PRO-D ONLY)	
	PPM1-PRO-D
Wavelength measurement range (nm)	1260 to 1469, 1481 to 1499, 1511 to 1625
Calibrated wavelengths (nm)	1310, 1490, 1550, 1577, 1625
Power measurement range (dBm)	15 to -45
Power uncertainty (dB) ^{a, c}	0.5
Auto-wavelength recognition and switching ^d	Yes
Tone detection ^e	270 Hz, 330 Hz, 1 kHz, 2 kHz

GENERAL SPECIFICATIONS		
Dimension	133 mm x 78 mm x 30 mm (5 ¼ in x 3 in x 1 ⅛ in)	
Display size	71 mm (2.8 in)	
Weight (with battery)	225 g (0.5 lb)	
Display type	Color display with capacitive touchscreen	
Interface languages	Chinese (Simplified and Traditional), English, French, German, Spanish, Italian	
Battery charging	< 2h when unit is off USB type C charging port connector AC/DC charger/adaptor input: 100 - 240 V; 50/60 Hz; 1.0 A max, output: 5 V; 2 A	
Battery autonomy	10 h (continuous use at brightness 50%, BLE: ON, AUTO: OFF)	
Interfaces	Bluetooth 5.0 with BLE USB type C	
Storage capacity	1000 test results for local reading	
Warranty ^f	3 years	
Calibration interval	3 years	
Temperature	Storage	-40 °C to 70 °C (-40 °F to 158 °F)
	Operating	-10 °C to 50 °C (14 °F to 122 °F)

VISUAL FAULT LOCATOR (VFL) (PPM1-PRO ONLY)	
Laser, 650 nm ± 10 nm	
CW/Modulate 1 Hz/Modulate 4 Hz	
Typical P _{out} in 62.5/125 µm: > -1.5 dBm (0.7 mW)	
Laser safety: Class 2	



- a. Typical, at 23 °C ±3 °C.
- b. Only available on hardware revision C.
- c. At calibrated wavelengths.
- d. With EXFO light sources.
- e. For the range -35 dBm to 10 dBm.
- f. Excluding connector wear.



ACCESSORIES

Carrying pouches

GP-2267 Soft pouch carrying case

Wrist strap

GP-3157 Wrist strap

Power adapters

GP-2227 USB AC adapter (includes interchangeable plugs for North America, Europe, UK and Australia)

GP-3257 USB-A to USB-C cable

Battery

GP-2295 Rechargeable battery

Connector adapter

GP-1008 VFL adapter for 1.25 mm ferrule

ORDERING INFORMATION

PPM1-XX-XX

Configurations

D= Dual PON layer
PRO-D = Pro configuration with dual PON layer

Connectors

88 = SC/APC connector

Example: PPM1-PRO-D-88

EXFO headquarters T +1 418 683-0211 Toll-free +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

For the most recent patent marking information, please visit www.EXFO.com/patent. EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.